


### ► Features


- Stores up to 32 units of 19" equipment
- In-depth adjustable vertical supports
- Loading capacity up to 450 Kg
- Unrestricted air flow due to open-frame design
- Assembly in record-breaking time by a single person
- Floor standing use
- Sturdy & low-cost solution
- Ships as flat-down package

### ► Description

The DPR932 is a professional and solid constructed 4-post open-frame rack for 19" equipment compliant to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. It offers a sturdy and low-cost solution, suitable for installing up to 32 units of 19" equipment. The open frame construction is made of solid steel and finished in a black (RAL9004) powder coating with fine structure. Adjustable vertical supports allow in depth adjustment within a range of 56 to 102 cm. Delivery in a flat-down package allows easy transportation of the rack to any installation location, while the simple structure allows assembly by a single person in a record-breaking time.

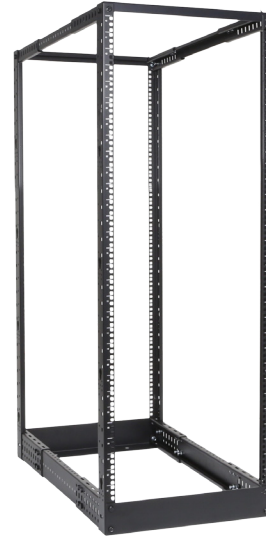

### ► Technical Drawing

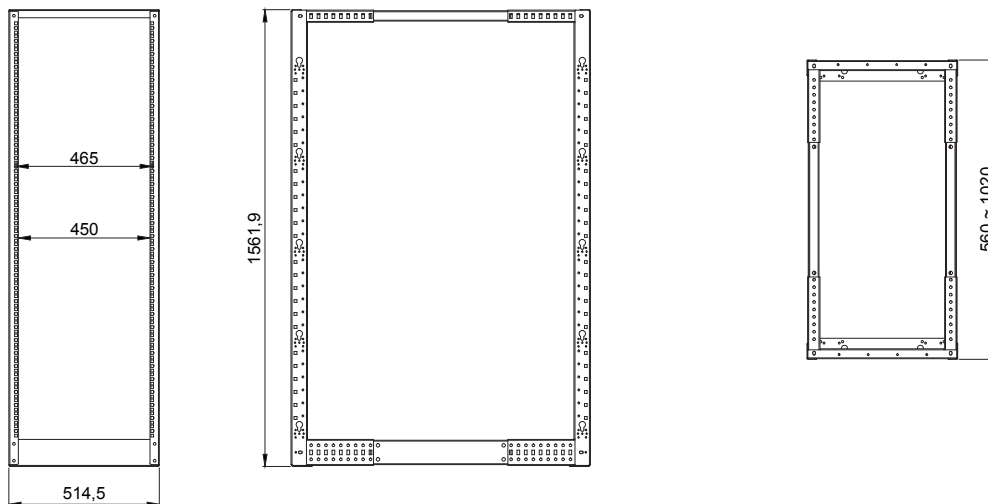

### ► Specifications

PROPERTY	VALUE
Unit height	32 HE
Max usable depth	550 ~ 1015 mm
Max load	450 kg
Width	514,5 mm
Depth	560 ~ 1020 mm
Height	1561,9 mm
Weight	xxx kg
Rack color	Black (RAL 9004)

### ► Included Accessories

ARTICLE	QUANTITY
Assembly hardware	1 set
Cage nuts + screws	25

### ► Optional Accessories

ARTICLE	DESCRIPTION
KM600	Cage nuts
KS600	Screws for cage nuts