

### ► Features


- Stores up to 12 units of 19" equipment
- Loading capacity of 50 Kg
- Integrated ventilation grid on top
- Cable entry on top & bottom (closable)
- Removable sides for easy installing & cabling
- Tempered glass door with keylock
- Front in depth adjustable 19" profiles (max 370 mm)
- Punched square holes for use with snap-in cage nuts

### ► Description

The EPR412 is an economical wall mountable 19" rack compliant to ANSI/EIA RS-310D, DIN41491, IEC 60297 standards. The construction is made of an 1.5 mm thick steel frame with 1.0 mm thick plates and is finished with a black (RAL9004) fine structured powder coating. It stores up to 12 units of 19" equipment, comes fully assembled and can easily be mounted on the wall. The 19" mounting profile with punched square holes for use with snap-in cage nuts in combination with the printed unit measurement indicators ensure easy fitting of the equipment. The tempered glass front door is reversible and secured with a key lock which keeps the equipment accessible for authorized persons only. Other present features are removable sides and in depth adjustable 19" profiles allowing easy and flexible cabling & installation.



### ► Technical Drawing

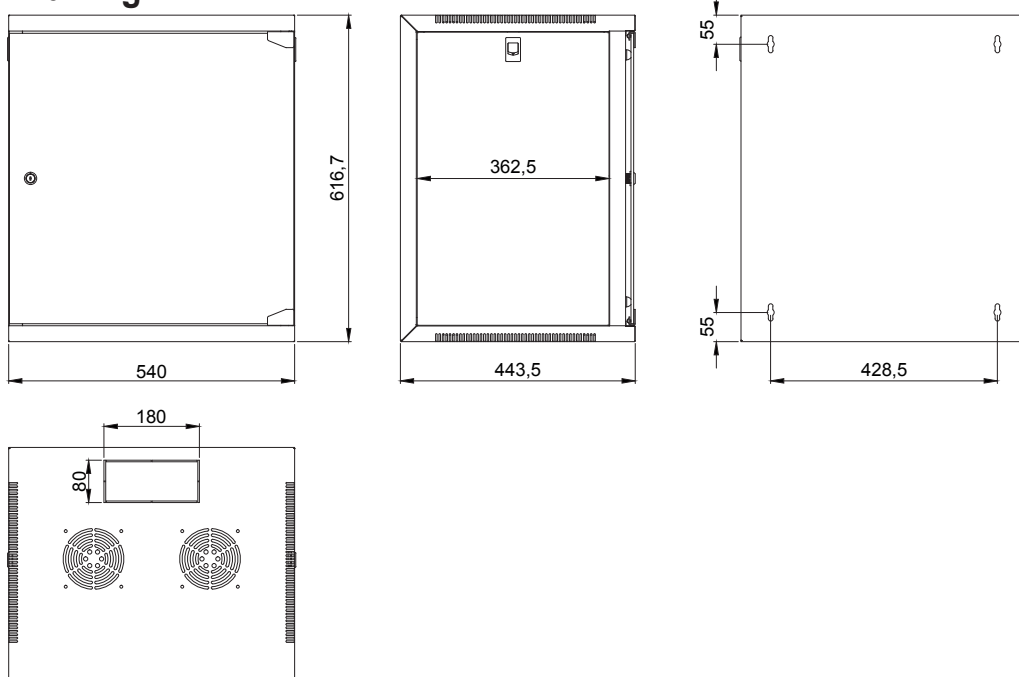

### ► Specifications

| PROPERTY         | VALUE            |
|------------------|------------------|
| Unit height      | 12 HE            |
| Max usable depth | 370 mm           |
| Max load         | 50 kg            |
| Width            | 540 mm           |
| Depth            | 443,5 mm         |
| Height           | 616,7 mm         |
| Weight           | xxx kg           |
| Rack color       | Black (RAL 9004) |

### ► Included Accessories

| ARTICLE            | QUANTITY |
|--------------------|----------|
| Key for front door | 2        |
| Cage nuts + screws | 25       |

### ► Optional Accessories

| ARTICLE | DESCRIPTION          |
|---------|----------------------|
| KM600   | Cage nuts            |
| KS600   | Screws for cage nuts |