

► Features


- Stores up to 9 units of 19" equipment
- Loading capacity of 60 Kg
- Integrated ventilation grid on top
- Cable entry on top & bottom (closable)
- Removable sides for easy installing & cabling
- Tempered glass door with keylock
- Front in depth adjustable 19" profiles (max 410 mm)
- Punched square holes for use with snap-in cage nuts

► Description

The WPR409 is a professional 19" wall mount metal rack compliant to ANSI/EIA RS-310D, DIN41491, IEC 60297 standards. The solid construction made of an 1.5 mm thick steel frame and 1.2 mm thick plates is finished with a black (RAL9004) or white (RAL9003) fine structured powder coating. It stores up to 9 units of 19" equipment, comes fully assembled and can easily be mounted on the wall. The 19" mounting profile with punched square holes for use with snap-in cage nuts in combination with the printed unit measurement indicators ensure easy fitting of the equipment. The tempered glass front door is reversible and secured with a key lock which keeps the equipment accessible for authorized persons only. Other present features are removable sides and in depth adjustable 19" profiles allowing easy and flexible cabling & installation.



► Technical Drawing

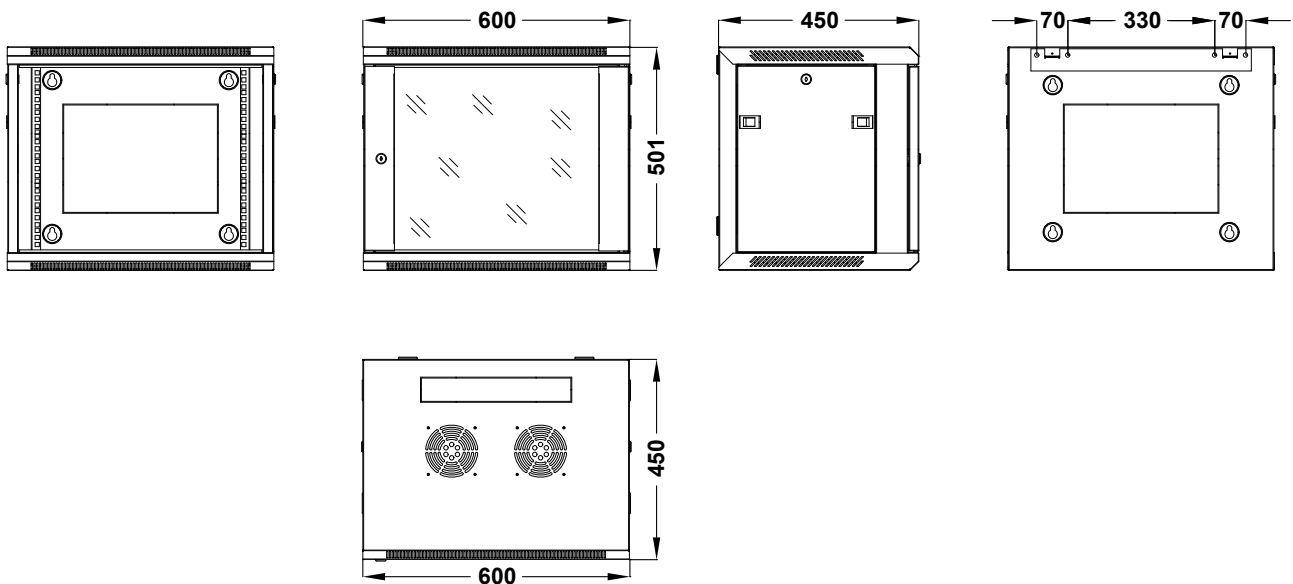

► Specifications

PROPERTY	VALUE
Unit height	9 HE
Max usable depth	410 mm
Max load	60 kg
Width	600 mm
Depth	450 mm
Height	501 mm
Weight	22,3 kg
Rack color	Black (RAL9004) White (RAL9003)

► Included Accessories

ARTICLE	QUANTITY
SPR45LR	1
Key for front door	2
Key for sidepanel lock	4
Cage Nut + Screw	10
Allen key	1

► Optional Accessories

ARTICLE	DESCRIPTION
WPR45FS	Fixed shelf
WPR45LR	L-Rail pair
WPR10RF	Roof fan 120x120 mm
SPR10DC	Dust cover brush
KM600	Cage nuts
KS600	Screws for cage nuts

► Architects' and Engineers' Specifications

The rack shall have the following dimensions: height 501 mm, depth 450 mm, width 600 mm, have a weight of 22,3 kg and hold up to 9 units. The rack shall comply with ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. The wall panel shall be separable from the rack which allows preloading of the rack and mounting of the panel without the rack attached. The frame of the rack shall be constructed out of cold rolled steel of 1,5 mm thick while for the other parts a thickness of 1,2 mm shall be used. These parts shall have a textured black (RAL9004) or white (RAL9003) powder coating. The mounting rail shall be adjustable in depth and have printed unit measurement indicators. Rack shall include tempered glass door on the front equipped with standard key-lock. Sides of the rack shall be removable and the top shall have a ventilation grid.